




San Driveshaft Co., Ltd.

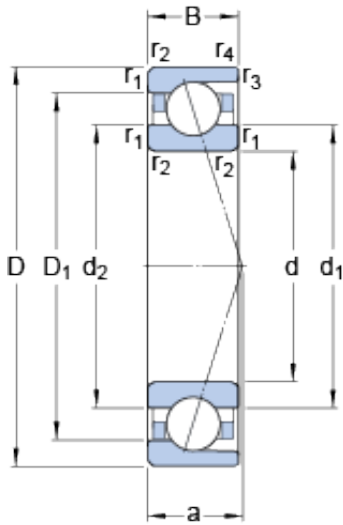

7213 ACD/P4A Bearing 2D drawings and 3D CAD models

65 mm x 120 mm x 23 mm SKF 7213 ACD/P4A Duplex angular contact ball bearings

Bearing No. 7213 ACD/P4A

Size	120x65x23 mm
Bore Diameter	120 mm
Outer Diameter	65 mm
Width	23 mm
d	65 mm
D	120 mm
B	23 mm
d ₁	82.9 mm
d ₂	82.9 mm
D ₁	102.1 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	0.6 mm
a	33.2 mm
d _a - min.	74 mm
d _b - min.	74 mm
D _a - max.	111 mm
D _b - max.	115.8 mm
r _a - max.	1.5 mm
r _b - max.	0.6 mm
d _n	86.6 mm
Basic dynamic load rating - C	63.7 kN
Basic static load rating - C ₀	51 kN
Fatigue load limit - P _u	2.2 kN
Limiting speed for grease	10000 r/min



San Driveshaft Co., Ltd.

Lubrication	
Limiting speed for oil lubrication	17000 mm/min
Ball - D_w	15.875 mm
Ball - z	15
G_{ref}	12.471 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	400 N
Preload class B - G_B	800 N
Preload class C - G_C	1600 N
Preload class D - G_D	3200 N
Calculation factor - f	1.07
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.01
Calculation factor - f_{2C}	1.02
Calculation factor - f_{2D}	1.05
Calculation factor - f_{HC}	1
Preload class A	189 N/micron
Preload class B	245 N/micron
Preload class C	324 N/micron
Preload class D	437 N/micron



San Driveshaft Co., Ltd.

Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.031
Product Group	B04270
Enclosure	Open
Precision Class	ABEC 7 ISO P4
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	25 Degree
Preload	None
Raceway Style	1 Rib Outer Ring
Cage Material	Phenolic
Rolling Element	Ball Bearing
Flush Ground	No
Inch - Metric	Metric
Other Features	Single Row Angular Contact Super Precision High Capacity
Long Description	65MM Bore; 120MM Outside Diameter; 23MM Width; Open Enclosure; ABEC 7 ISO P4 Precision; Steel Ball Material; 1 (Single) Bearings; 25 Degree Contact Angle; Phenolic Cage Material; 1 Rib Outer Ring Ra
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact Ball
Manufacturer URL	http://www.skf.com



San Driveshaft Co., Ltd.

Manufacturer Item Number	7213 ACD/P4A
Weight / LBS	2.271
Outside Diameter	4.724 Inch 120 Millimeter
Bore	2.559 Inch 65 Millimeter
Width	0.906 Inch 23 Millimeter
d_1	82.9 mm
d_2	82.9 mm
D_1	102.1 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	74 mm
d_b min.	74 mm
D_a max.	111 mm
D_b max.	115.8 mm
r_a max.	1.5 mm
r_b max.	0.6 mm
d_n	86.6 mm
Basic dynamic load rating C	63.7 kN
Basic static load rating C_0	51 kN
Fatigue load limit P_u	2.2 kN
Attainable speed for grease lubrication	10000 r/min
Attainable speed for oil-air lubrication	17000 r/min
Ball diameter D_w	15.875 mm
Number of balls z	15
Reference grease quantity G_{ref}	12.471 cm ³
Preload class A G_A	400 N
Static axial stiffness, preload class A	189 N/ μ m
Preload class B G_B	800 N
Static axial stiffness, preload class B	245 N/ μ m



San Driveshaft Co., Ltd.

Preload class C G_C	1600 N
Static axial stiffness, preload class C	324 N/ μ m
Preload class D G_D	3200 N
Static axial stiffness, preload class D	437 N/ μ m
Calculation factor f	1.07
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.02
Calculation factor f_{2D}	1.05
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	1.03 kg