




San Driveshaft Co., Ltd.

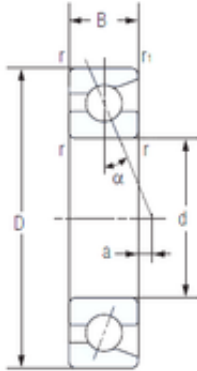

20 mm x 47 mm x 14 mm NACHI 7204C Pressed Steel Cages Single-Row Angular Contact Ball Bearings

Bearing No. 7204C

7204C Bearing 2D drawings and 3D CAD models

Size	20x47x14 mm
Bore Diameter	20 mm
Outer Diameter	47 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
C	14 mm
Angle (°)	15 °
a -	3,1 mm
r min.	1 mm
r1 min.	0,6 mm
da min.	26 mm
Da max.	41 mm
ra max.	1 mm
Weight	0,11 Kg
Basic dynamic load rating (C)	14,7 kN
Basic static load rating (C0)	8,15 kN
(Grease) Lubrication Speed	34500 r/min
Configuration	Single Row
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	20 mm
Outside Diameter	47 mm



San Driveshaft Co., Ltd.

Width	14 mm
Fillet Radius/Chamfer	1 mm
r1	0.6 mm
a	-3.1 mm
Dynamic Load Rating	14,700 N
Static Load Rating	8,150 N
Limiting Speed - Grease	24,000 rpm
Limiting Speed - Oil	33,000 rpm
da1 (min)	26 mm
da2 (min)	26 mm
Da1 (max)	41 mm
Da2 (max)	43.4 mm
ra (max)	1 mm
ra1 (max)	0.6 mm